


## \* Comparison b/w 8085 & 8086

	8085	8086
Size	8-bit MP	16 bit MP
Add. bus	16-bit add-bus	20 bit add. bus
memory	ALU upto 64kb	upto 1 Mb.
I/O	address $2^8 = 256$ I/O.	Address $2^{16} = 65536$ I/O.

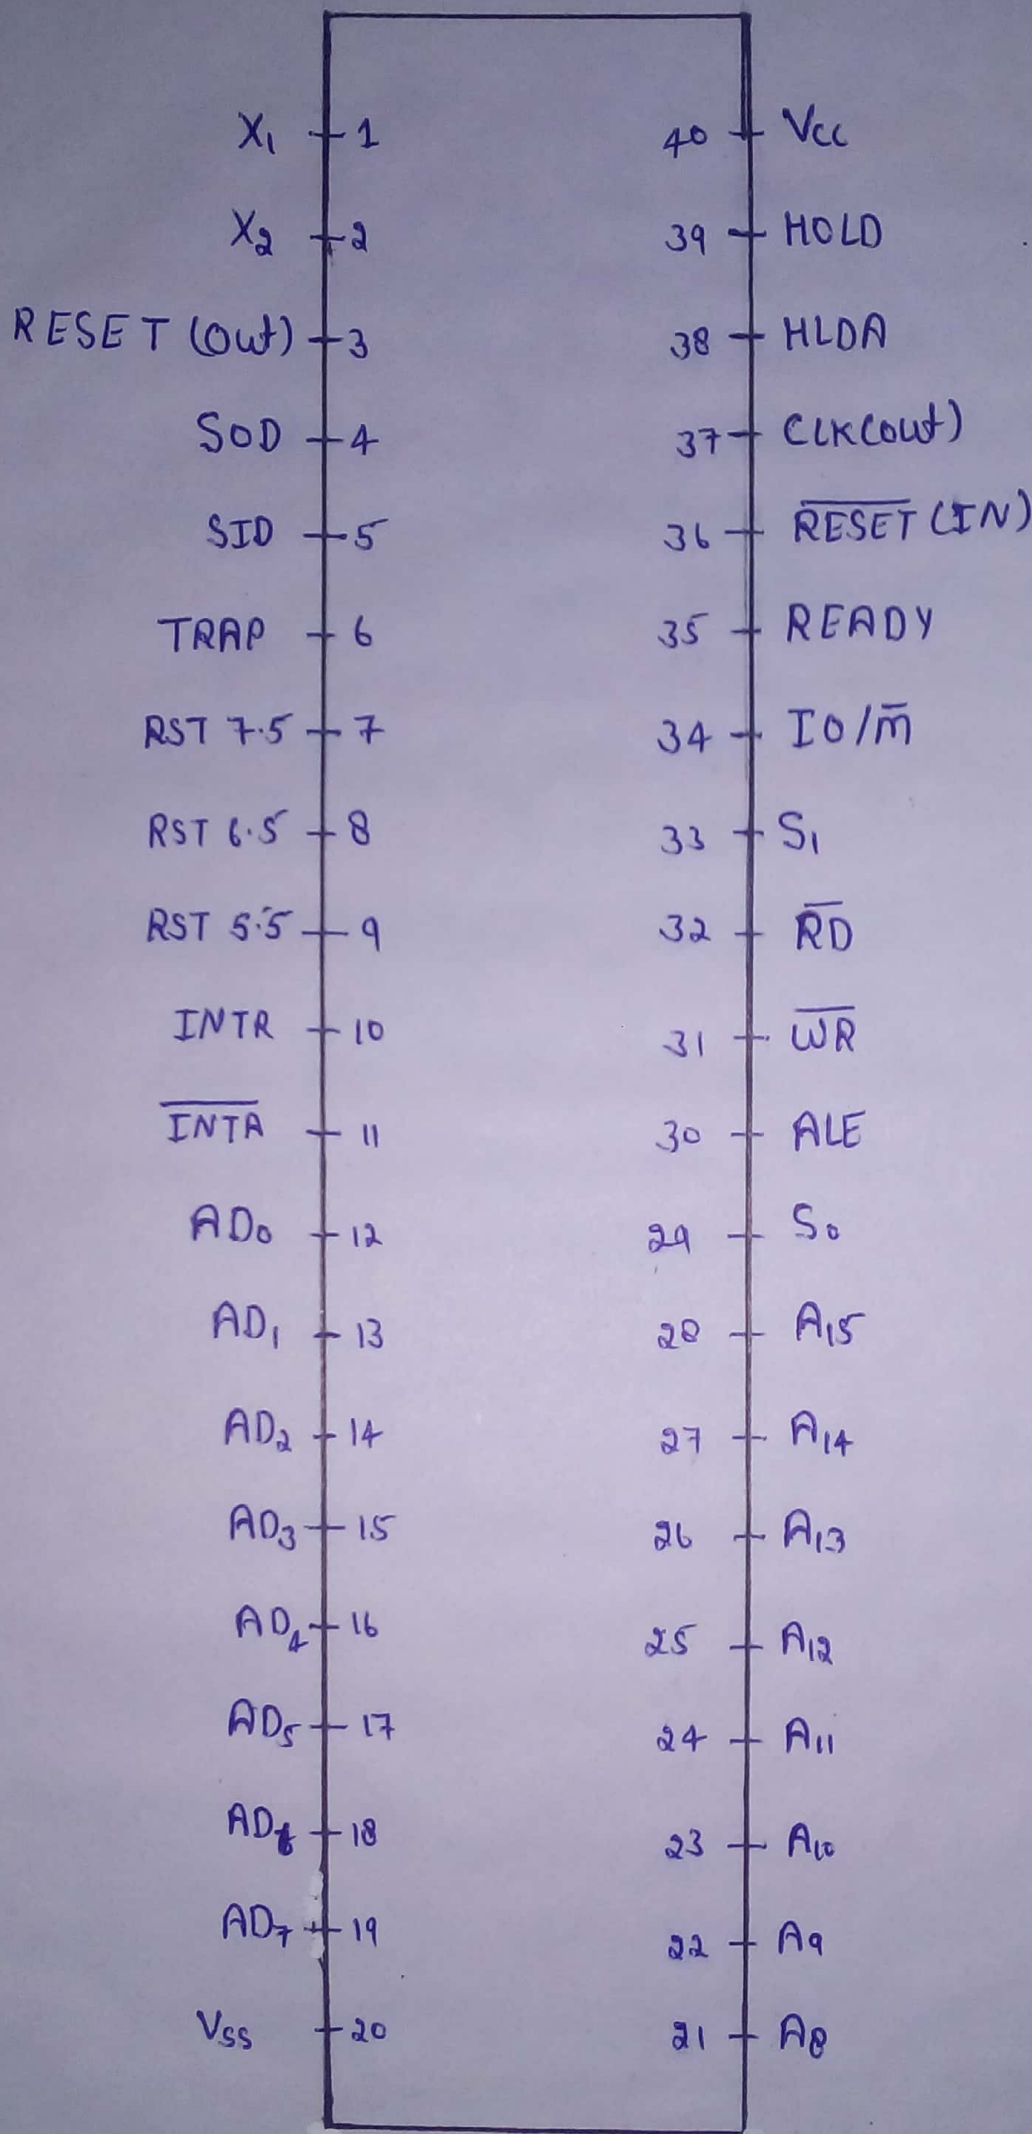

8085 - PIN DIAGRAM